




Certificates

FSC® mix credit (available on request)

FM.FD88|ATTRACT SMOOTH MATTE 90 CAST COATED PAPER

PRODUCT SPECIFICATION

Weight	g/m ²	87	± 5
Thickness	µm	105	± 7
CIE whiteness (D65/10°) min.ISO 2469		> 150	
Opacity min.ISO 2469	%	> 95	

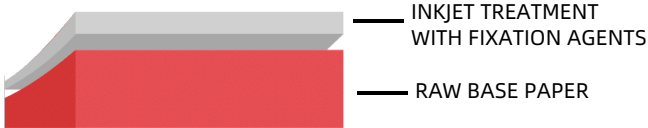

LABEL PRINTING

Printability

Simplex printable

Printing Technology

- Inkjet water-based dye
- Inkjet water-based pigment partial

KEY APPLICATIONS

Label printing

- Food packaging: hang-tags
- Wine, spirits, craft, beverages: hang-tags
- Retail: hang-tags
- Events: tickets, name badges



Directions for use

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH).

at least 24 hours before usage.

Modifications reserved.